FEATURES

The Noritz NRCR offers the latest cutting edge recirculation technology in a tankless water heater. This unit is equipped with high quality stainless steel heat exchangers for extreme corrosion and thermal stress resistance, giving your tankless a longer lifespan. In addition, a recirculation pump comes integrated with the unit to give you hot water faster and without the wait.

STEADY BTU MODE

An industry first, the NRCR's revolutionary burner control eliminates issues with high incoming water temperature in the summer by reducing effective BTU output to less than 5 KBTU.

SBTU[®]

BEST-IN-CLASS EFFICIENCY

With a UEF rating of 0.95 (NRCR111) and 0.96 (NRCR92), the NRCR helps conserve energy while reducing harmful emissions into the environment.

HIGH QUALITY **STAINLESS STEEL** HEAT EXCHANGERS

The NRCR features a 15 year warranty on its heat exchangers, which are composed of high quality stainless steel and designed for easier serviceability.

INTEGRATED **RECIRCULATION PUMP**

Built with an integrated pump allowing a 1/2" loop with a length of up to 200 feet (or 3/4" up to 500 feet), the longest in the industry.

Plus! Now you can activate your pump using motion activation and other wireless accessories (sold separately)





Preservation transitions carefully before using this approace WMMMOC
Chink added and carefully water temperature to prevent social - Net Water hearts forgettage size: 2277-057 C care datas see tours instance or deart how catefully.

1 x Receiver 2 x Transmitters

OUTDOOR VENT KIT VC-6-1

Our new plastic outdoor vent cap is now easier to install and features a new elegant design. Compatible with EZ, NRCR, and NCC199CDV models.

CROSSOVER KIT

CSV-BPK

Our crossover kit brings recirculation to homes without a return line. Set your NRCR to crossover mode after installation and your home is ready for faster, hot water.

COMMERCIAL REMOTE

RC-9018M

Unlock additional programing options and functions for your NRCR with our commercial remote.

WIRELESS ON-DEMAND **BUTTON KIT**

WLB

Activate the NRCR's on-demand recirculation mode with this Title 24 compliant wireless push button. Kit contents include 2 wireless transmitters, wireless receiver, and a signal connector.

THE TECHNOLOGY LEADER IN HOT WATER HEATING

Noritz has been an innovator in the water heating industry for over 60 years. We introduced the first modern, electronically controlled tankless water heater in 1981 and we remain the leader in energy savings and superior hot water delivery today.

N NORITZ[®]

Sat-Sun 7am - 4pm PST

11160 Grace Avenue Fountain Valley, CA 92708 1-866-766-7489 Monday - Friday 5am - 6pm PST

OFFICIAL NORITZ ACCESSORIES

Get ultimate comfort and control out of your NRCR when paired with any of our Noritz-certified accessories.



2" SV **CONVERSION KIT**

SV-CK-2-1

Our 2" single vent conversion kit upgrades direct vent (DV) installs to non-direct vent (SV) operation.

UNIVERSAL CONCENTRIC TERMINATION KIT

PVC-UCVK



The universal concentric vent kit allows for verstile venting installation for your tankless unit. It provides an up-and-out horizontal termination option for all EZ, NRCR, NCC199CDV, and NRCB Models



WIRELESS **MOTION SENSOR**

WLB-MS

Activate your tankless water heater from anywhere in your home when you come in range of the sensor.

1 x Wireless Motion Sensor



Also Available: **EXTRA WLB TRANSMITTER** WLB-ET



ALWAYS HOT

N NORITZ[®] TANKLESS WATER HEATERS





RECIRCULATION REINVENTED

Featuring the latest in recirculation technology, the NRCR offers a variety of new modes to help keep your home with endless hot water while intelligently adapting to your usage and more.



NTEGRATED RECIRCULATION PUMP

 $\langle \boldsymbol{\Box} \rangle$

The NRCR Residential Condensing Tankless Water Heater uses a fully integrated pump to keep hot water close to even the farthest outlet in the home, minimizing the wait and, therefore, the waste of unused potable water down the drain.


FULL RECIRCULATION MODE

No more waiting for hot water in your home. Utilizing your home's existing return line and the NRCR's integrated pump, our full recirculation mode allows for faster hot water delivery without the wait.



CROSSOVER MODE

No return line in your home? No problem. The NRCR's Crossover Mode allows for recirculation without a dedicated return line (Accessory# CSV-BPK; sold separately), saving you the hassle of installing additional piping.

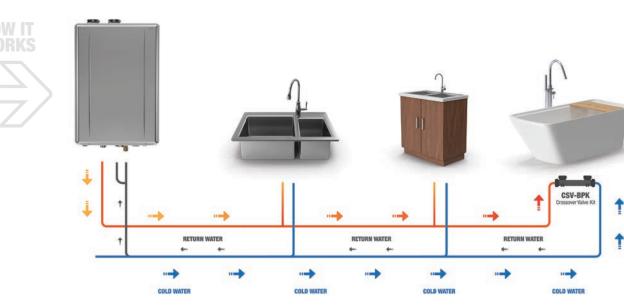

ENGINEERED FOR PERFORMANCE

No more waiting for hot water. The Noritz NRCR can provide you with faster hot water wherever and whenever you need it. It does this by recirculating the water through your plumbing system, so hot water is always available in whatever part of the house that you may need it. The best part is, Noritz can provide this solution regardless of your current plumbing configuration.



ECHNICAL

SPECIFICATIONS


		NRCR92DV	NRCR NRCR111DV
GQ Reference Number		GQ-C2660WXQ-FF US	GQ-C3260WXQ-FF US
BTU Input Range		18,000 - 165,000	18,000 - 199,900
Min / Max Flow Rate		0.5 GPM - 9.2 GPM	0.5 GPM - 11.1 GPM
Flow Rate at ∆T	30°F	9.2 GPM	11.1 GPM
	45°F	7.1 GPM	8.7 GPM
	80°F	4.0 GPM	4.9 GPM
Dimensions		27" (Height) x 18.5" (Width) x 14.1" (Depth)	
Weight		73 lbs.	
Connection Sizes	Water Inlet	3/4"	
	Hot Water Inlet	3/4"	
	Gas Inlet	3/4" (1/2" up to 60ft.)	3/4" (1/2" up to 40 ft.)
	Condensing Drain	1/2" Threaded	
Freeze Protection		Yes, pump circulation + resistance heat	
UEF		0.95	0.96
Warranty		15 Year Warranty on Heat Exchanger , 5 year warranty on parts & 1 year reasonable labor	
Temp Settings	°F Mode	100-140° (In 5° Intervals) (9 Options)	
	°C Mode	37-48°C (In 1°C Intervals), 50-60°C (In 5° Intervals) (15 Options)	
Recirc Lengths		200 feet (1/2") / 500 feet (3/4")	
Venting Lengths		2" PVC (65 feet), 3" PVC (150 feet) or Flex Vent (35 feet)	
Wifi Compatible		In Development	

CUSTOMIZE YOUR HOT WATER

Equipped with a variety of fully customizable modes, the Noritz NRCR helps you simplify and personalize your home's hot water usage to work with your schedule.



The NRCR comes equipped with a new Steady BTU Mode feature, which eliminates issues with high incoming ground water temperature. By reducing BTU output to less than 5 KBTU, this mode prevents water temperature fluctuations while keeping your tankless running efficiently.

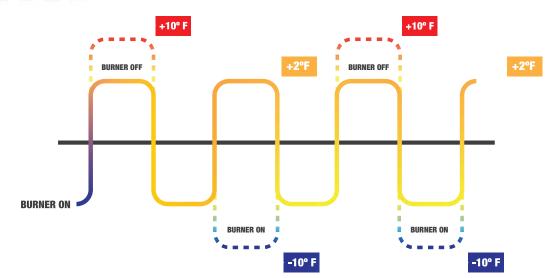

AUTO **LEARNING MODE**

The NRCR's auto learning mode intelligently keeps track of your hot water usage. It then uses this data to get you hot water faster based on your previous run times, eliminating wait times even further.



SCHEDULING MODE

Using our RC-9018M remote controller (Sold separately), the NRCR gives homeowners complete control of pump scheduling, allowing custom run times to fit your hot water demands.



ON-DEMAND MODE

Get your NRCR up and running at the touch of a button or flip of a switch. Simply install our ondemand accessories and your pump will begin circulating instant hot water throughout your home.



IHK-GB



ADDITIONAL MODES AVAILABLE

Paired with our included RC-7651M-A remote controller, the NRCR lets homeowners customize their heater with additional modes. From normal recirculation, crossover, and on-demand modes, the NRCR gives homeowners control of their hot water with our easy-touse remote.



