


REVISIONS			
REV.	DESCRIPTION	DATE	APPRVD.

**Notes:**  
 1. This unit produces acidic condensate during operation and must be drained and disposed according to local code. Use pipe material that will not corrode such as PVC or CPVC. Do not use materials such as black steel, iron, or other metals. Slope horizontal pipe downwards 1/4" per foot towards drain or condensate pump. Do not submerge or block end of drain pipe.

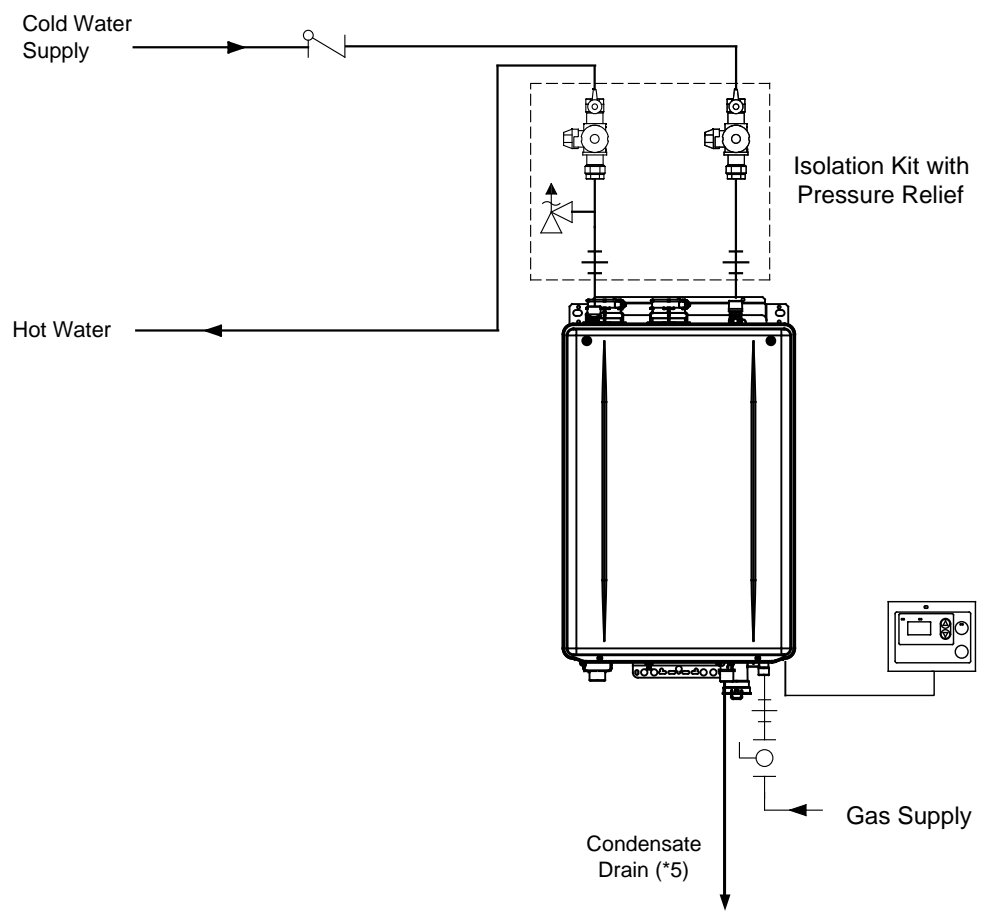

**MODEL:**  
Residential Condensing EZ

**APPLICATION:**  
Domestic Hot Water


**DRAWING NUMBER:**  
EZ-DHW

**DRAWING DATE:**  
October 2018

**Noritz Accessories**

Isolation Valve Kit with Pressure Relief (# IK-WV-200-1-TH/LF)

Residential Neutralizer (# NC-1)



*Note: This diagram is for reference only. Installation must comply with State and Local Code, all gas and water pipe must be sized correctly to specific length, according to accepted engineering methods or the UPC Code for Noritz Water Heaters to operate correctly.*

	Shut-off Ball Valve		AquaStat (Honeywell Model #L6006A or L6006C)
	Check Valve		Pump
	Union		Mixing Valve
	Pressure Relief Valve (Watts 174A, Zurn P3000BR, Cash Acme F-82)		Thermal Expansion Tank

**NORITZ**  
 11160 Grace Avenue  
 Fountain Valley, California 92708  
 866-7NORITZ (866-766-7489)  
 www.noritz.com