


REVISIONS

REV.	DESCRIPTION	DATE	APPRVD.

Notes:

1. Size the pump to provide a maximum of 2 GPM through the system at 10 ft of head plus piping losses. Adjust the flow using a globe valve and verify the flow rate with the maintenance monitors.
2. Set the Aquastat to 10°F below the water heater temperature setting.
3. Quick Connect Cable is only available for 2 unit Multi-System. When Quick Connect Cable is in use, pump control feature is disabled.
4. When connecting 2 water heaters with Quick Connect Cable, use only a single remote controller.
5. Size the piping to allow for the maximum flow rates of the units.
6. This unit produces acidic condensate during operation and must be drained and disposed according to local code. Use pipe material that will not corrode such as PVC or CPVC. Slope horizontal pipe downwards 1/4" per foot towards drain or condensate pump. Do not submerge or block end of drain pipe.

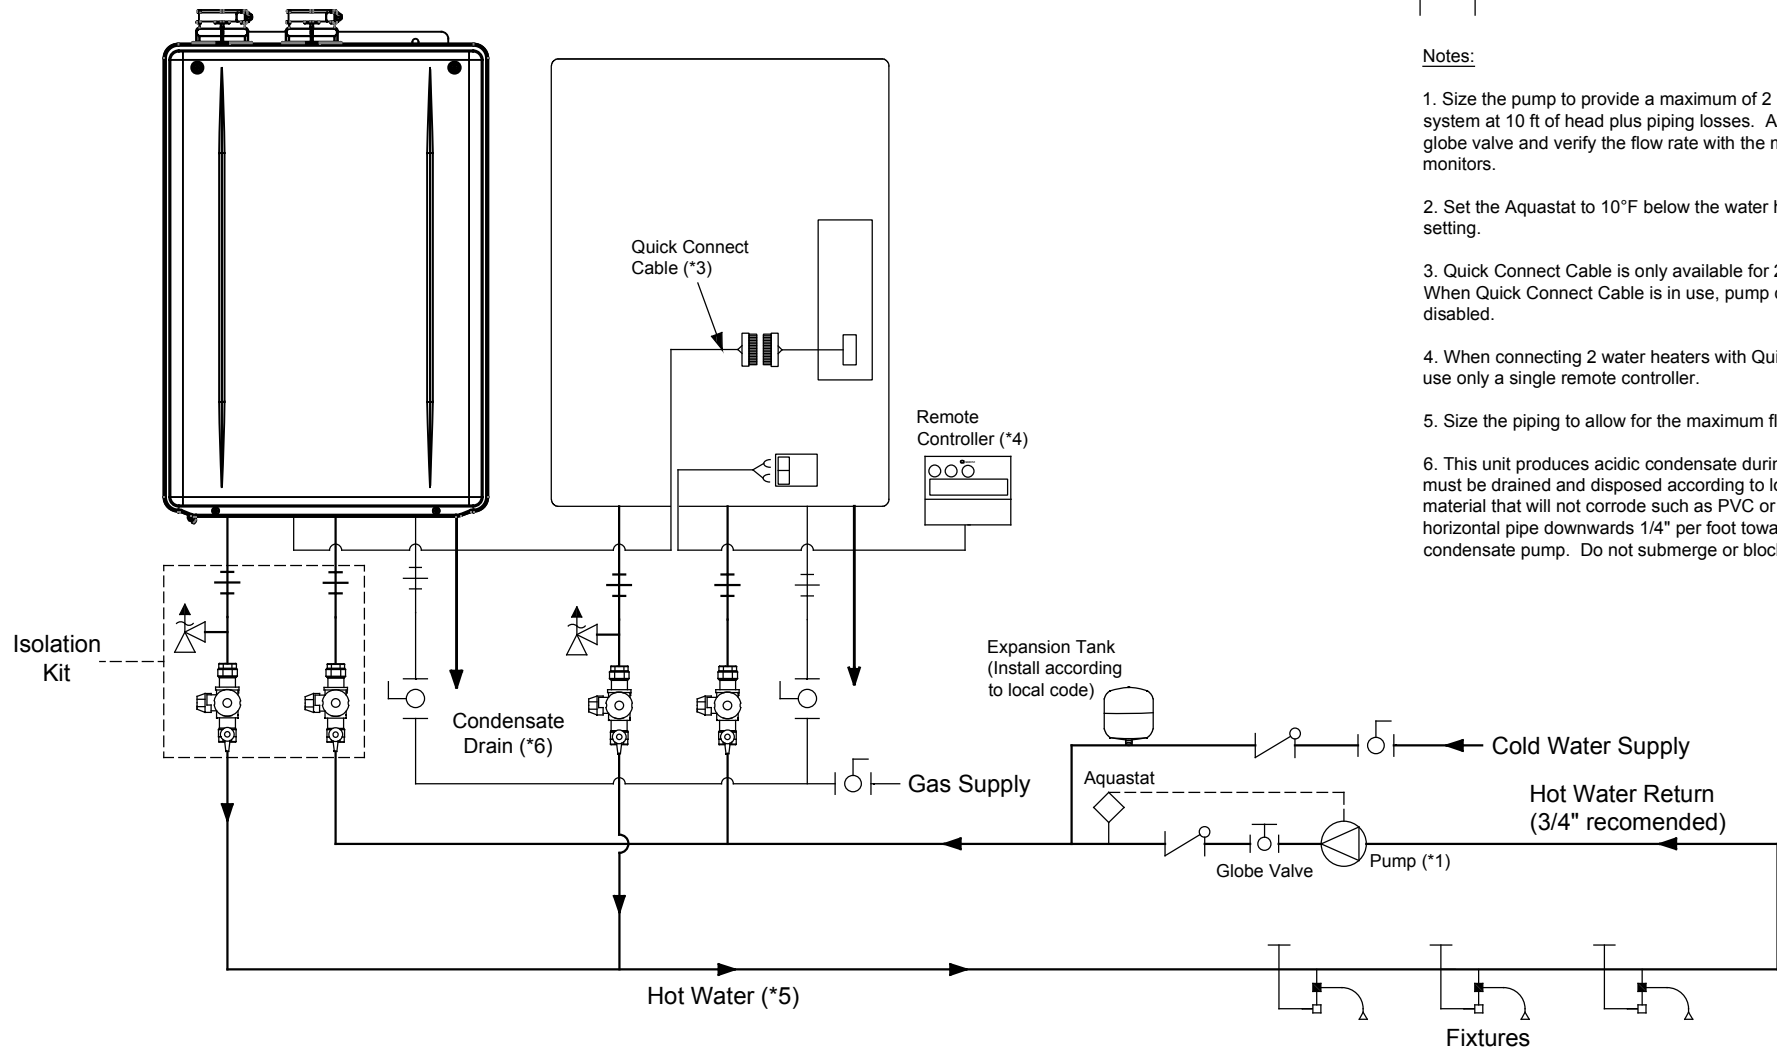

11160 Grace Avenue
Fountain Valley, California 92708
866-7NORITZ (866-766-7489)
www.noritz.com

MODEL:
Commercial Condensing

APPLICATION:
Domestic Hot Water
Quick Connect System
Recirculation

DRAWING NUMBER:
NCC-QC-REC

DRAWING DATE:
November 2018

Noritz Accessories

Isolation Kit w/ Pressure Relief
3/4" (# IK-WV-200-1-[TH or SW])
1" (# IK-300-1-[TH or SW])

Commercial Neutralizer
(# NT-20A)

Quick Connect Cable, for 2 unit
(# QC-2)

Note: This diagram is for reference only. Installation must comply with State and Local Code, all gas and water pipe must be sized correctly to specific length, according to accepted engineering methods or the UPC Code for Noritz Water Heaters to operate correctly.

	Shut-off Ball Valve		Aquastat (Honeywell Model #L6006A or L6006C)
	Check Valve		Pump
	Union		Mixing Valve
	Pressure Relief Valve (Watts 174A, Zurn P3000BR, Cash Acme F-82)		Thermal Expansion Tank