


Total Tankless Solution (TTS) Specification Sheet

TTS-SWH2

Standard Wall Hung Commercial Tankless Water Heater System

UNMATCHED TECHNOLOGY

FRG's TTS-SWH4 Series provides the most complete commercial water heater solution in the market. This tankless water heating system provides up to 399,800 BTU/hr. in a wall mounted platform for maximizing unutilized space, with built in redundancy and equalization of heating performance. With included brackets for easy installation lift, set, and forget this compact powerful all in one solution.

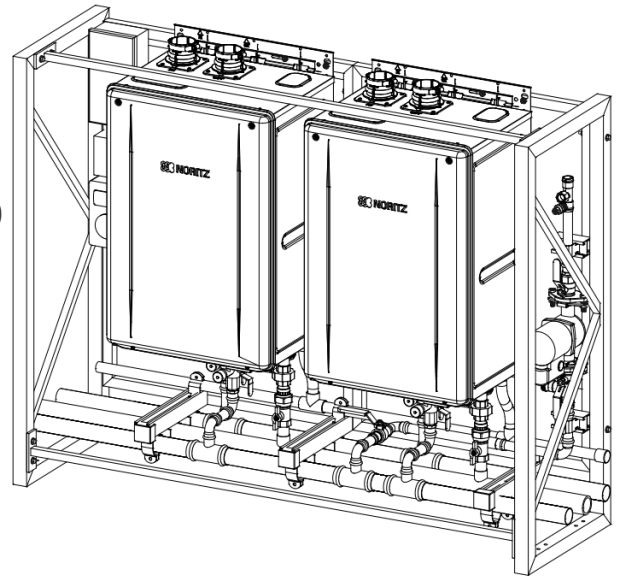

KEY FEATURES

OPC (One Point of Connection)

- Water, Recirculation Return Line, Power, Gas, Venting & Condensation Drain

Manifold systems

- Hot Water Outlet, Cold Water Inlet, Gas, Condensate Drain

Building recirculation

Reduction in labor hours

Worry-free installation

Designed to fit through 3'-0" x 7'-0" Door

Pre-engineered system

Pre-configured control wiring

Pre-installed system controllers

Warranty


- 10 Years Heat Exchanger per Tankless Unit
- 5 Years Water Heater Parts & Components
- 3 Year Circulation Pump
- 1 Year Labor

Additional Included Accessories:


- Condensate Neutralizer (Qty 1)
- Expansion Tank (Non-ASME)
- 4.5 Gallon

TTS-S SERIES SPECIFICATIONS (SYSTEM DIMENSIONS)


Model: TTS-SWH2

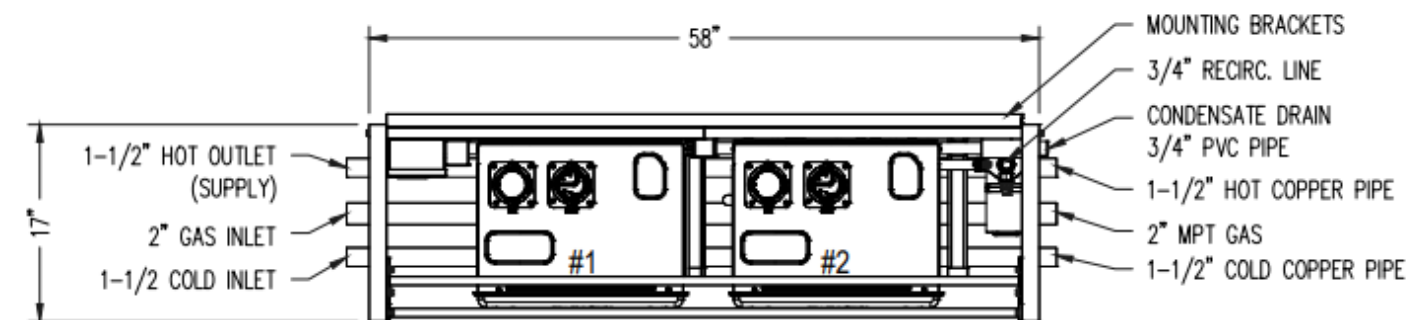

PLAN VIEW

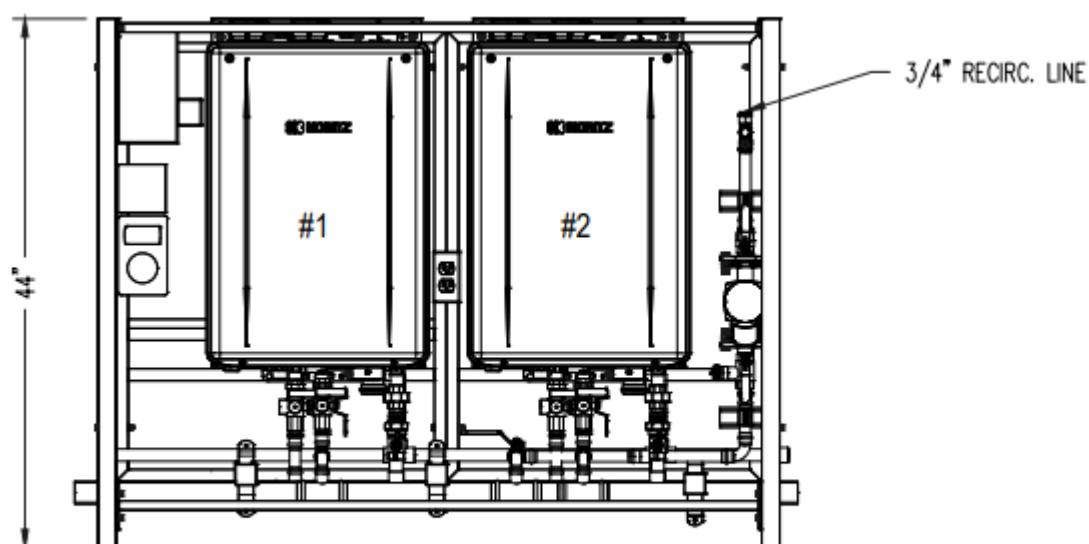

FRONT VIEW

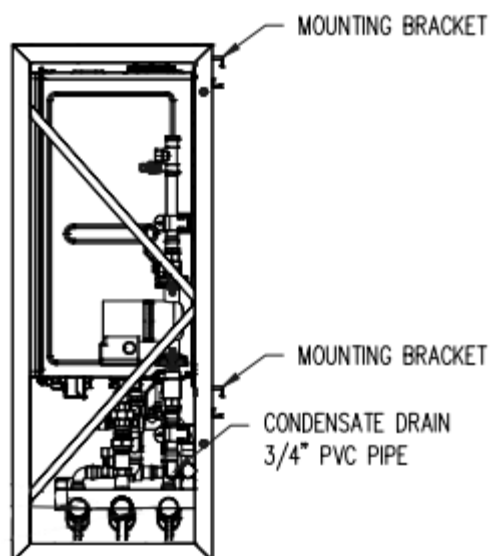

END VIEW

TTS-S SERIES SPECIFICATIONS (PARAMETERS)

Model Name		TTS-SWH2
Min. Input (BTU/HR)		12,800
Max. Output (BTU/HR)		399,800
Turn Down Ratio		32:1
System Dimensions L X D X H (IN)		58 X 17 X 44 (25 CU. FT.)
System Weight (LBS)		220
Shipping Dimensions L X D X H (IN)		64 X 26 X 52
Shipping Weight (LBS)		520
GPH @100°F Rise		468
Operating Pressure		15 - 150 psi
Gas Supply Pressure		NG: 3.5" - 10.5" LP: 8.0" - 14.0"
Water Holding Capacity		0.80 Gallon (3.2L) per Heater
Connection Size	Water Inlet	1-1/2" LC-ODT/PP
	Hot Water Outlet	1-1/2" LC-ODT/PP
	Hot Water Recirculation Return	3/4" LC-ODT/PP
	Gas Inlet	2" Sch40-BI-NPT
	Condensate Drain	3/4" Sch 40 PVC-ODT
Power Consumption	Supply Total Rack	208/240 VAC 1-PH 20-AMPS
	Sub - Heater	120VAC (60Hz), less than 4 amperes
	Sub - Recirculation Pump	120VAC (60Hz), 5 to 45W
Temperature Setting	°F Mode	100-150°F (In 5°F intervals), 160°F, 170°F, 185°F (14 Options)
	°C Mode	37-48°C (In 1°C intervals), 50-85°C (In 5°C intervals) (20 Options)
Materials	Heater Front Cover	Hot-dipped zinc-aluminum-magnesium-alloy-coated steel w/ Polyester Coating
	Heater Casing	Zincified Steel Plate / Polyester Coating
	System Rack	Aluminum
Pump Performance	Sub - Recirculation Pump	3.5-GPM @ 15' of head (see Pump Curve below)

